



Media coupler TR-RF KNX

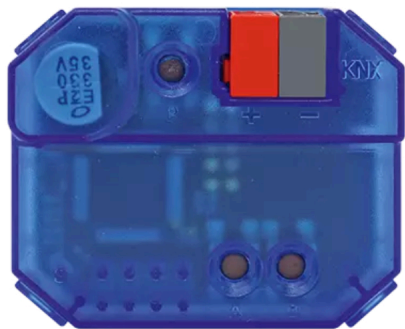

?? ???? : 9070868 ????? ???? RF ?? KNX

???? ???? : ???? ???? ???? ????
????

[?? ???? ?????? ?? ???? ?????](#)

???

Function description

- Connects KNX RF devices of one radio line with the KNX bus twisted-pair
- Power supply via KNX bus voltage
- Supports long frames for "KNX Secure" and enables faster download of large applications in parallel
- Ranges of max. 30 m within the building are possible
- Has a repeater function, i.e. received telegrams are sent again to increase the range
- Support of Segment Coupling and Secure Proxy functions as of ETS 6 application version 2.x

???????? ??

???? ???? ???? ??? ?????? ???? ?????.

// //