



SM 4 KNX

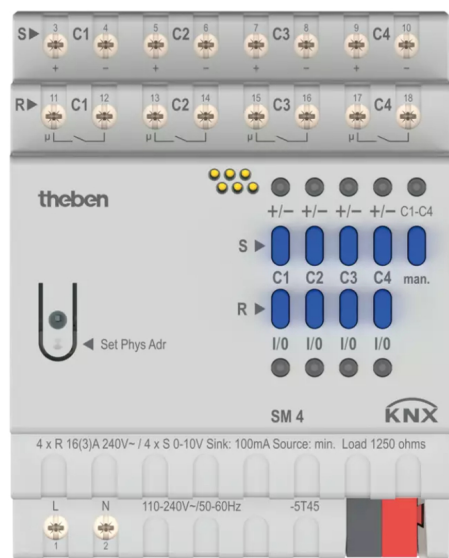

?? ???? : 4940310 ?????? 4 ????? ??? ? ???/???? 10 ???? ???? ???? ???? ???? ???? ???? 0-10V ?? 1-10V ?????/???? : 10A/600W ,Up to 800 W for Capacitive loads

???? ???? : ???? ???? ???? ????
????

[?? ???? ?????? ??? ????? ??????](#)

???

Function description

- DIN-rail 4-way switching/dimming actuator 10 A 133 μ F, KNX TP
- For the control of electrical consumers with 0-10 V or 1-10 V interface
- Flexible use of control and relay outputs
- Control outputs suitable for active (0-10 V, source) and passive control (1-10 V, sink), as well as mixed operation
- Support of colour and colour temperature control
- Simple commissioning and programming in the ETS, without additional tools or ETS app
- Secure communication via with support of „KNX Data Secure“

Inrush current max. 800 A, for the reliable switching of capacitive loads (ECG and LED drivers) •

?????? ??

??? ???? ???? ??? ????? ???? ?????.

// //