



TA 6.1 KNX

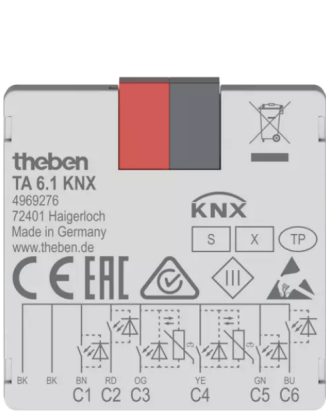

?? ???? : 4969276 ????? ?????? / ???? ???? 6 ????? ?? ????? ????? 8 ??

???? ???? : ???? ???? ???? ????
????

[?? ???? ?????? ?? ????? ??????](#)

???

Function description

- 6-way binary input push-button interface KNX TP
- 2 NTC inputs for detection of the actual temperature from -5 °C to +100 °C
- Secure commissioning and communication through support of KNX Data Secure
- Identification of the wire pairs via color coding
- Connectable cable length up to 30 m
- Can be installed in flush-mounted sockets with conventional sensors/switches
- Flexible LED controlling, thanks to increased output current of 3 mA commercially available LEDs and low current LEDs can be controlled
- Inputs can be reconfigured to outputs with parameterizable flashing and pulsing function
- Colour coding of wiring pairs

??????? ??

???? ???? ???? ??? ?????? ???? ?????.

// //