


BMG 6 T KNX

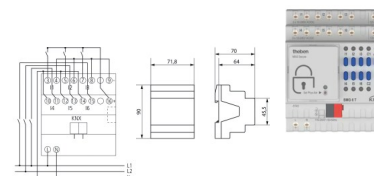

?? ???? : 4930230 ????? ?????? 6 ????? ??? MIX2 ??? ???? ?

???? ?????: ????? ???? ???? ????
????

[?? ????? ?????? ???? ????? ??????](#)

???

Function description

- 6-way binary input MIX2 •
- Base module MIX2 •
- Can be upgraded to maximum of 18 channels •
- 6 floating universal and wide-range voltage inputs (10-240 V AC/DC or internally generated auxiliary voltage of approx. 12 V DC) •
- 2 additional channels operable by buttons on the device, but without input •
- Up to two extension modules MIX or MIX2 can be connected to one base module •
- Device and KNX bus module can be swapped independently of each other •
- Removable KNX bus module enables devices to be changed without reprogramming •
- Manual set-up and use of actuator is possible without KNX bus module •

LED switching status display for each channel •

?????? ??

??? ???? ???? ??? ????? ???? ?????.

// //