
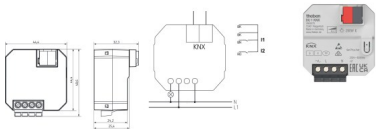


DU 1 KNX

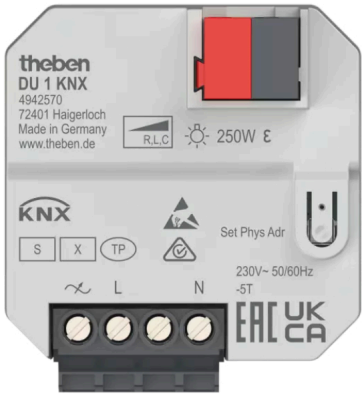

?? ???? : 4942570 ?????? ?? ?????? ???? ?? ?????? KNX

???? ???? : ???? ???? ???? ????
????

[?? ???? ?????? ??? ?????? ??????](#)

???

Function description

- 1-way flush-mounted dimming actuator •
- Secure communication with support of „KNX Data Secure“ •
- Optimised dimming output for dimmable energy-saving lamps, LEDs, incandescent and halogen lamps, and dimmable transformers •
- Easy to adapt to different lamps thanks to automatic load detection •
- Adjustable dimming curve for precise and flicker-free dimming •
- 2 binary inputs for floating contacts such as buttons, switches, temperature sensor (I2) •
- The binary inputs are assigned to the dimming output as standard (function test before programming) •
- Integrated temperature monitoring for increased operating safety, e.g. in the event of overload •

?????? ??

???? ???? ???? ??? ?????? ???? ?????.

// //